

AQA: Adaptive Question Answering in a Society of LLMs via Contextual Multi-Armed Bandit

Mohanna Hoveyda¹, Arjen P. de Vries¹, Maarten de Rijke², Harrie Oosterhuis¹, Faegheh Hasibi¹

¹Radboud University, Nijmegen, The Netherlands

²University of Amsterdam, Amsterdam, The Netherlands

{mohanna.hoveyda, arjen.devries, harrie.oosterhuis, faegheh.hasibi@ru.nl}@ru.nl, m.derijke@uva.nl

Abstract

In question answering (QA), different questions can be effectively addressed with different answering strategies. Some require a simple lookup, while others need complex, multi-step reasoning to be answered adequately. This observation motivates the development of a dynamic method that adaptively selects the most suitable QA strategy for each question, enabling more efficient and effective systems capable of addressing a broader range of question types. To this aim, we build on recent advances in the orchestration of multiple large language models (LLMs) and formulate adaptive QA as a dynamic orchestration challenge. We define this as a contextual multi-armed bandit problem, where the context is defined by the characteristics of the incoming question and the action space consists of potential communication graph configurations among the LLM agents. We then train a linear upper confidence bound model to learn an optimal mapping between different question types and their corresponding optimal multi-LLM communication graph representation. Our experiments show that the proposed solution is viable for adaptive orchestration of a QA system with multiple modules, as it combines the superior performance of more complex strategies while avoiding their costs when simpler strategies suffice.

1 Introduction

Large language models (LLMs) have facilitated the development of diverse question answering (QA) systems and pipelines, each with distinct performance across domains (Cuconasu et al. 2024; Jeong et al. 2024; Li et al. 2024; Ram et al. 2023; Xu et al. 2024). The increasing complexity of these QA pipelines stems from the integration of various steps, each designed to either mitigate particular errors introduced by a module (or interactions between them) or to address questions of different types or with varying requirements (Jeong et al. 2024; Trivedi et al. 2023). Although these complex modular designs aim to enhance overall system robustness and accuracy in generating answers, it substantially increases inference costs. Additionally, a single sophisticated answering strategy may not be the most suitable solution for all types of questions (Jeong et al. 2024).

Complex LLM-based QA systems. The large variety of recent retrieval augmented generation (RAG) approaches (Ram et al. 2023) provides a good example of the

increasing complexity of QA systems. RAG enables the use of external knowledge during inference without re-training or modifications to the LLM-architecture. To improve its effectiveness, many additional parameters and modules have been proposed for RAG, e.g., retrieving subgraphs from a structured knowledge base alongside or instead of passages (BehnamGhader, Miret, and Reddy 2023; Dai et al. 2024; Pan et al. 2023, 2024), employing summarization techniques (Edge et al. 2024), introducing noise to retrieval results (Cuconasu et al. 2024), and natural language inference modules that preprocess the retrieved content for the LLM (Yoran et al. 2024a). Another example of complex QA systems are those designed to cater to more complex questions, such as multi-hop questions (Yang et al. 2018), which require the integration of several pieces of knowledge. In such contexts, techniques have been proposed to enhance the deductive capabilities of LLMs, including CoT (Wei et al. 2022), ToT (Yao et al. 2023), LINC (Olausson et al. 2023), and interleaved retrieval CoT (Trivedi et al. 2023). Various recent studies on LLM orchestration propose to automate the integration of multiple steps in a QA system pipeline (Li et al. 2023; Park et al. 2023; Zhuge et al. 2023, 2024). However, complex approaches to QA systems do not always improve performance since LLMs can struggle to effectively use the expanded context (Liu et al. 2024).

Adaptive QA Systems. In real-world use cases, not all types of questions that a QA system receives require the same amount of computation or the same sophisticated answering strategy. Accordingly, the complexity of building a reliable LLM-based QA system has increased, since it requires effective collaboration between different modules, such as LLMs, IR modules, and any intermediate processing steps (Li et al. 2024; Xu et al. 2024). The rise in module count also greatly increases inference time and computational costs. Consequently, there is a growing emphasis on creating adaptive QA frameworks that dynamically adjust to varying question characteristics (Asai et al. 2024; Jeong et al. 2024; Mallen et al. 2023).

Approach. In this paper, we build on the recently-introduced concept of graph-based LLM orchestration to develop an adaptive QA system. Zhuge et al. (2024) approach the problem of orchestrating multiple LLMs as a graph optimization problem, where each LLM-based module is de-

fined as a sub-graph (or a node) and communication among them is formulated as edges in the final graph. We propose a novel framework for the adaptive selection and execution of graph configurations that are best-suited for the complexity level of each given question. We frame the adaptive orchestration of collaboration in multi-agentic systems as a contextual multi-armed bandit (CMAB) problem where the decision points are incoming questions and their characteristics serve as context to the CMAB, the action space consists of the set of all possible graph configurations. In other words, the CMAB chooses which pipeline to apply per question, and thus, adapts its complexity and inference costs dynamically. We evaluate our proposed adaptive orchestration framework in a QA setup.

Contributions. Our main contributions are the following:

- We propose an *Adaptive Question Answering* (AQA) framework for the adaptive orchestration of multi-agent LLM-based QA systems, that enables the execution of the most suitable answering strategy based per question.
- Our framework uniquely frames the orchestration of multi-agent LLM-based systems as a *contextual multi-armed bandit* (CMAB) problem, motivated by the high effectiveness of CMABs in limited action spaces. This sets it apart from the policy gradient methods in previous work.
- To the best of our knowledge, our adaptive orchestration framework AQA is the first to optimize a combination of effectiveness and inference cost, enabling it to balance efficiency and performance when selecting answering strategies over varying question complexities.
- We provide an experimental evaluation of the AQA framework over a multi-complexity-level QA dataset. Our results indicate that AQA successfully recognizes and applies an optimal mapping between question types and the most-suitable answering strategies.

2 Related Work

2.1 Adaptive Retrieval Augmented Generation

Adaptive-Retrieval for RAG was first addressed by Mallen et al. (2023), who propose a dynamic model that decides whether to retrieve external documents per incoming question. Specifically, Mallen et al. (2023) propose a binary threshold-based framework that tries to distinguish whether questions contain popular or long-tail entities, and decides whether to retrieve accordingly. Inspired by reinforcement learning reward models, Asai et al. (2024) introduced Self-RAG, a language model that generates text interleaved with pre-embedded reflection tokens to critique and guide the generation process in real-time. Jeong et al. (2024) propose Adaptive-RAG, a language model trained as a complexity classifier to predict question complexity, and subsequently, select the most suitable model accordingly. Our framework is similar, but instead of assuming the optimal strategy for each complexity label, a CB is applied to learn which strategy works best. Thereby, we also avoid relying on training language models for decision making, in contrast with previous work (Asai et al. 2024; Jeong et al. 2024), which can be

prone to the hallucinations and unfaithful reasoning (Siegel et al. 2024) that is common in LLMs.

2.2 Multi-Agentic LLM Orchestration

Several studies have tried to create an effective framework for letting multiple LLMs and related modules communicate to solve tasks (Hong et al. 2024; Wu et al. 2023). Most existing work focuses on orchestration without further optimization of the structure of these agents (Wu et al. 2023; Zhuge et al. 2023). Inspired by Minsky’s society of minds (SoM) (Minsky 1988), which describes how smaller parts of a system can collaborate to achieve a goal, Zhuge et al. (2023) suggest a shift from relying on optimizing a single model for solving a task to the optimization of information flow between two or more models. This approach reveals a wide variety of possible orchestrations of (agentic) models, from which a selection can be made to match the task at hand.

Zhuce et al. (2024) propose GPTSwarm to optimize a society of language models. GPTSwarm structures the QA system pipeline as a graph, and every computational operation, e.g., querying a large language model with a prompt, is represented as a node within that graph. The dual-level optimization approach of GPTSwarm optimizes prompts at the node level while also enhancing the flow of information by pruning out edges and nodes that are not found useful.

Similar to Zhuce et al. (2024), our orchestration framework is focused on graph optimization to improve the communication between modules. However, Zhuce et al. (2024) apply policy gradients and produce a single graph structure for all questions, whereas we use a CMAB approach that can adapt the graph per individual question.

3 Method: The Novel Adaptive Question Answering Framework

We frame *adaptive question answering* (AQA) as a contextual multi-armed bandit (CMAB) problem (Langford and Zhang 2007; Slivkins 2019). Accordingly, our objective is to train a CMAB to select the answering strategy for each incoming question that optimizes effectiveness and efficiency.

3.1 Question Context Vector

Various features of a question can be important when choosing answering strategies, e.g., semantic information about the content of the question, or more miscellaneous features such as the length of its text, its knowledge domain, etc. Let Q_t denote an incoming question at timestep t ; we represent Q_t by a *context vector* $x_t \in \mathbb{R}^d$ with dimensionality d where each element x_{ti} represents a feature of Q_t :

$$x_t = [x_{t1}, x_{t2}, \dots, x_{td}].$$

The context vector x_t is all the information on which the CMAB bases its decision at timestep t . For this work, we assume that the question-complexity of Q_t can be inferred from x_t .

Algorithm 1: Adaptive question answering via a contextual multi-armed bandit algorithm for multi-agent LLM orchestration.

```

1: Input: the set of agents  $\mathbf{L}$ , exploration parameter  $\alpha$ 
2:  $\mathbf{V} \leftarrow \emptyset$ 
3: for each agent  $l_i \in \mathbf{L}$  do
4:    $v_i \leftarrow \text{Node}(l_i)$ 
5:    $\mathbf{V} \leftarrow \mathbf{V} \cup \{v_i\}$ 
6: end for
7:  $v_{\text{final}} \leftarrow \text{MajorityVoting}()$ 
8:  $\mathbf{V} \leftarrow \mathbf{V} \cup \{v_{\text{final}}\}$ 
9:  $\mathbf{E} \leftarrow \{(v_i, v_j) \mid v_i, v_j \in \mathbf{V} \wedge i \neq j \wedge v_i \neq v_{\text{final}}\}$ 
10:  $\mathbf{G} \leftarrow (\mathbf{V}, \mathbf{E})$ 
11:  $\mathcal{G} \leftarrow \{G_i \mid E(G_i) \subseteq E(\mathbf{G}) \wedge \text{DAG}(G_i) \wedge \text{deg}^-(v_{\text{final}}) > 0$ 
    $\wedge (\forall v_i \in V, \text{deg}(v_i) = 0 \vee \text{Path}(v_i, v_{\text{final}}))\}$ 
12: for each action  $a \in \mathcal{G}$  do
13:    $\mathbf{A}_a \leftarrow \mathbf{I}_d$ 
14:    $\mathbf{b}_a \leftarrow \mathbf{0}$ 
15: end for

16: for each timestep  $t$  do
17:   Wait for next question  $Q_t$  and observe  $x_t \in \mathbb{R}^d$ 
18:   for each action  $a \in \mathcal{G}$  do
19:      $\theta_a \leftarrow \mathbf{A}_a^{-1} \mathbf{b}_a$ 
20:      $p_{t,a} \leftarrow \theta_a^T x_t + \alpha \sqrt{x_t^T \mathbf{A}_a^{-1} x_t}$ 
21:   end for
22:    $a_t \leftarrow \arg \max_a p_{t,a}$ 
23:   Apply answering strategy  $a_t$  and observe performance  $P_t$ 
24:    $r_t \leftarrow \beta \cdot P_t - \gamma \cdot T_t$ 
25:    $\mathbf{A}_{a_t} \leftarrow \mathbf{A}_{a_t} + x_t x_t^T$ 
26:    $\mathbf{b}_{a_t} \leftarrow \mathbf{b}_{a_t} + r_t x_t$ 
27: end for

```

3.2 Agents

Let $\mathbf{L} = \{l_1, l_2, \dots, l_n\}$ be the set of agents employed to generate an answer to a given question. L can include a variety of LLMs, both standard and augmented with advanced capabilities, e.g., retrieval (Ram et al. 2023) or reasoning (Trivedi et al. 2023; Wei et al. 2022), in addition to other auxiliary modules that feature a natural language interface (Zhuge et al. 2023) such as query rewriters (Chan et al. 2024), NLI models (Yoran et al. 2024b), and theorem provers (Olausson et al. 2023). While our framework works for any arbitrary \mathbf{L} , the experiments in this work follow the setup proposed by Trivedi et al. (2023) and used by Jeong et al. (2024) and concern the following three agents:

$$\mathbf{L}' = \{\text{NoR}, \text{OneR}, \text{IRCoT}\}. \quad (1)$$

Each of these agents are designed to handle questions of specific complexity levels. We describe them in increasing order of their targeted complexity level:

- **NoR:** An LLM with *no retrieval* augmentation. NoR answers questions without additional external data, making it most suited for simple non-knowledge-intensive questions that match its encoded parametric knowledge.
- **OneR:** An LLM augmented by *one-time retrieval*. Upon receiving a question, an IR module is called *once* to provide n potentially relevant documents alongside the question for the LLM. OneR is most suited for questions that require access to external knowledge.

- **IRCoT:** An LLM augmented with retrieval and prompted to apply chain-of-thought (COT) reasoning. The retrieved documents are interleaved in several back-and-forth reasoning steps. As the most complex and time-consuming strategy, IRCoT is most-suited for questions where NoR and OneR are expected to fail, i.e., ones that demand extensive knowledge or a synthesis of multiple pieces of knowledge to produce an accurate answer.

3.3 Graph Design

We define a graph as $\mathbf{G} = (\mathbf{V}, \mathbf{E})$, where \mathbf{V} represents the set of nodes and \mathbf{E} the set of directed edges. Following the experimental setup outlined in (Zhuge et al. 2024) for the MMLU dataset (Hendrycks et al. 2021), we choose \mathbf{V} to be \mathbf{L} with the addition of a final decision node v_{final} :

$$\mathbf{V} = \{l_1, l_2, \dots, l_n, v_{\text{final}}\}. \quad (2)$$

The node v_{final} aggregates the outputs of connected nodes through a majority vote, so that the most frequent answer from the agents becomes the final response.¹ The edges \mathbf{E} represent the interactions between nodes, and, thus, are defined according to what interactions are possible between the specific agents. To guarantee the graph is executable, we constrain the edges so that no cycles are allowed.

To summarize, our graph describes how multiple agents can collaborate to generate a response, where nodes represent agents and a final aggregation of their responses, and edges the interactions between them. Correspondingly, the goal of our AQA framework is to learn the most suitable graph configuration for each incoming question.

3.4 Action Space

Our action space is the set of all possible answer strategies, each represented by a different graph G . Therefore, selecting an answer strategy can be reformulated as choosing the edges \mathbf{E} of the graph. Zhuge et al. (2024) apply a policy gradient approach with a graph sampling method to this problem; we differ by taking a CMAB approach.

Our motivation for this difference stems from the following two observations: (i) the number of agents and their possible interactions is generally limited; and (ii) many possible graphs have equivalent execution patterns. Therefore, the set of graphs with unique answering strategies is finite and often of a manageable size for CMAB algorithms. This is beneficial, since it avoids the high variance of policy gradients and their associated sampling, which can make CMABs more effective.

In order to apply the CMAB algorithm, we first need to compute the set of possible actions. Luckily, this only has to be done once, as answering strategies are not question specific. The set of graphs that represent unique answering strategies are defined by any edges \mathbf{E} that meet the following constraints: (i) the resulting graph is a directed acyclic graph (DAG); (ii) the final decision node has at least one incoming edge and no outgoing edges; and (iii) every agent node either has no edges or there exists a path from it to the final

¹See (Zhuge et al. 2024) for other possible final decision nodes.

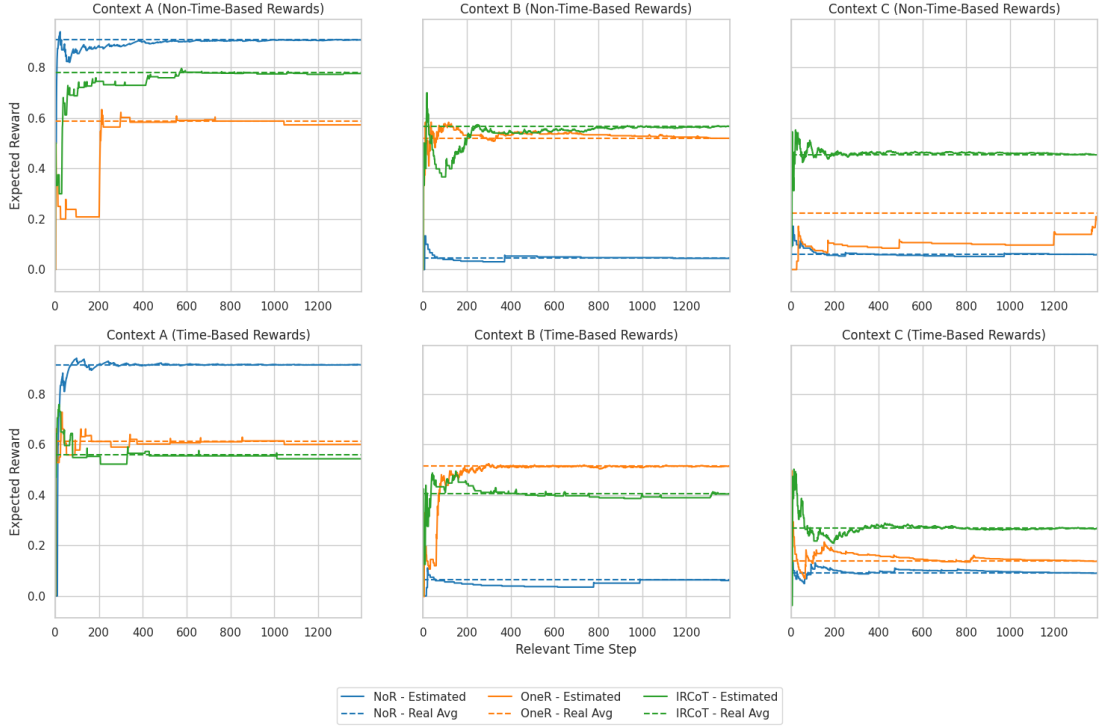


Figure 1: LinUCB expected rewards for individual agents action Space, dashed lines depict the real rewards per action.

node. We note that the final constraint prevents islands of interacting agents that do not affect the final response. The set of all graphs that meet these constraints is defined as \mathcal{G} ; for the CMAB this is simply the set of possible discrete actions.

3.5 AQA: Adaptive QA via Contextual Bandit for Multi-Agents Orchestration

Finally, we describe our complete AQA approach analogous to Algorithm 1. We start with the set of agents \mathbf{L} (Line 1), and subsequently, pre-compute the set of possible actions \mathcal{G} : every graph that meets the conditions in Section 3.4 (Line 2–11). As a result, \mathcal{G} now represents every unique answering strategy possible through the collaboration between the agents in \mathbf{L} . For the CMAB algorithm, \mathcal{G} contains the finite set of discrete actions for the setting. We note that AQA allows for more constraints on the graphs, e.g., on what agents can interact directly, or a maximum on the number of agents involved to bound computational costs.

Next, we define our objective to be optimized. As stated before, we wish to balance the performance of a strategy with the costs of its execution, on a per-question level. For a question Q_t at timestep t , let P_t denote performance, i.e., the *correctness* of the generated answer; and let T_t denote the cost for generating it. Our reward signal is a linear combination of P_t and T_t with parameters $\beta \in [0, 1]$:

$$r_t = \beta \cdot P_t - (1 - \beta) \cdot T_t. \quad (3)$$

Our choice of CMAB algorithm is LinUCB (Li et al. 2010); with the pre-computed action space, our problem matches the LinUCB setting. Accordingly, we initialize LinUCBs

model parameters \mathbf{A}_a and \mathbf{b}_a (Line 12–14). During training, \mathbf{A}_a aims to capture the covariance of context vectors x_t , i.e., the correlation between different features, and \mathbf{b}_a the linear relationship between the features and rewards received. The algorithm enters an indefinite loop (Line 16–27), that repeats the following process: First, an incoming question Q_t is received and its features x_t are observed (Line 17). A context-specific upper bound on the reward for each action is computed and the action with the highest value is selected (Line 18–22). The corresponding answering strategy is executed; the generated answer is presented to the user and the performance P_t is observed (Line 23). The reward is computed as a weighted average of P_t and the generation costs T_t (Line 24). LinUCB updates its parameters accordingly (Line 25–26) and the loop repeats. Over time, the parameters will converge such that the upper bounds of the best answering strategies are greater than those of other actions. Consequently, LinUCB can recognize and execute the best answering strategy for every x_t , given enough training time. Importantly, because the answering strategies are selected according to x_t , AQA dynamically adapts its strategies to the properties of each individual question.

4 Experiments

4.1 Agents

For all our experiments, the base LLM of all agents is Flan-T5-XL which is also the model incorporated by Trivedi et al. (2023) and Jeong et al. (2024). Our implementation of the agents mirrors the exact setup, roles, prompts, retrieval models, and parameters used by Jeong et al. (2024).

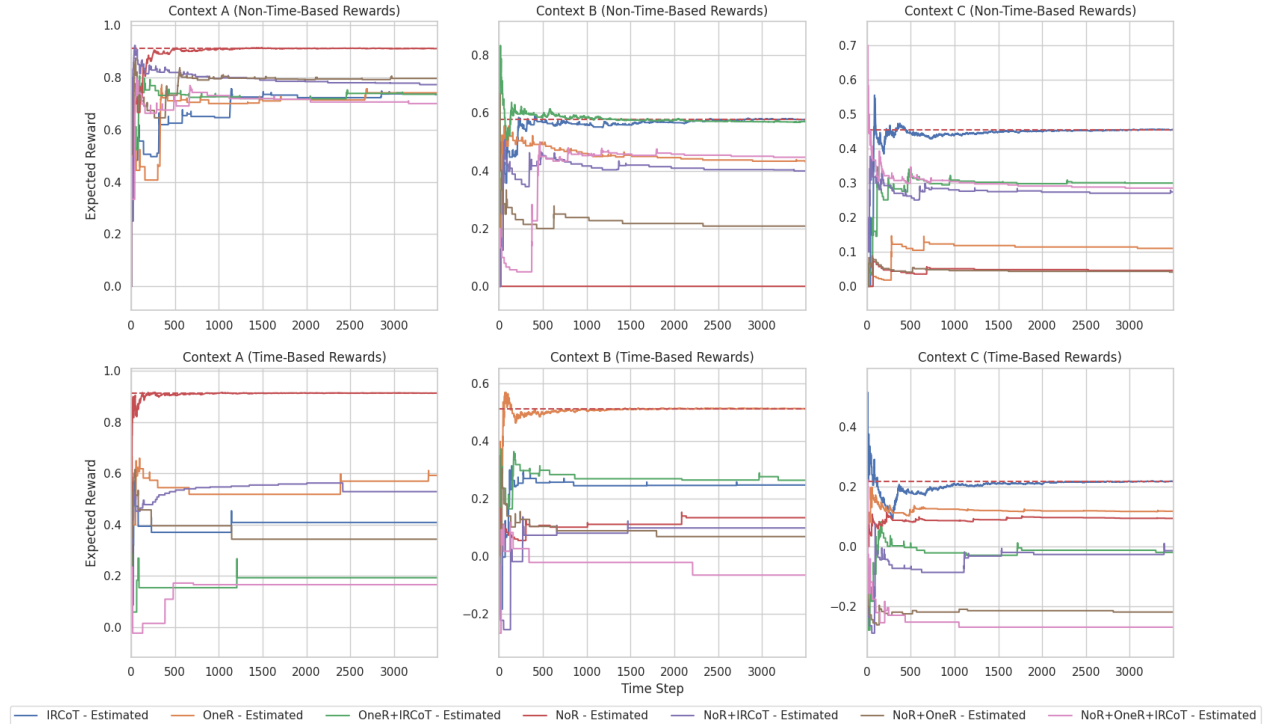


Figure 2: LinUCB expected rewards for the collaborative action space, dashed line depicts real reward for the optimal action.

4.2 Dataset

We use the dataset developed by Jeong et al. (2024) for building and evaluating RAG for QA systems. It features a diverse array of questions, categorized into varying levels of complexity. Each question has one of three complexity labels that were generated using Flan-T5-XL: Label A indicates that the question can be answered directly without retrieval; label B requires single-step retrieval; and label C necessitates multiple reasoning steps along with retrieval.

For our study, we randomly selected 210 questions and their labels from this dataset for training purposes and 51 questions for testing. We maintained an equal distribution of the three complexity labels in the sets to ensure a balanced representation for training a CMAB. The complexity labels are used as the contextual features x_t for the CMAB.

4.3 Action Spaces

We perform two sets of experiments:

- **Individual agents action space.** Our first set covers a simpler setting where graphs are limited to a single edge. Consequently, the action space represents the responses of individual agents, mimicking the setup of Jeong et al. (2024). We use this setting to verify whether the CMAB can learn the optimal context-agent mapping, without any orchestration.
- **Collaborative agents action space.** The second set of experiments places no additional limitations on the allowed graph structures. This allows us to evaluate how well the CMAB can optimize when collaboration and dynamic orchestration.

	NoR		OneR		IRCoT	
	F1	Time (s)	F1	Time (s)	F1	Time (s)
Context A	0.914	0.66	0.677	6.46	0.730	189.78
Context B	0.061	0.66	0.518	7.34	0.580	192.30
Context C	0.066	0.67	0.146	6.41	0.458	184.85
Overall	0.347	0.66	0.447	6.74	0.589	188.97

Table 1: Performance of each individual agent on the training set (by F1-score and average time in seconds).

4.4 Setup and Hyperparameters

We train the LinUCB model for 20 and 50 epochs for the *individual* and *collaborative* action spaces respectively, with exploration parameter $\alpha = 2$. For the reward, we set $\beta = 0.5$ and base the computation costs on execution time. We add the multiplicative penalties: with S_t as execution time in seconds, for the *individual* setting we set $T_t = S_t \frac{\mathbb{I}[S_t > 1]}{1000}$; and for the *collaborative* $T_t = S_t \left(\frac{\mathbb{I}[1 < S_t \leq 10]}{10000} + \frac{\mathbb{I}[S_t > 10]}{50} \right)$. Each of our models (different setups of AQA and GPTswarm) are trained once by setting a fixed random seed. The experiments are ran on a machine with two NVIDIA GeForce RTX 3090 GPUs, each with 24 GB of memory. Computational resources are primarily used for hosting the LLMs and not for training the CB models.

4.5 Evaluation Metric

In all experiments, we measure performance (P_t) using the F1-score, calculated by comparing each agent’s generated

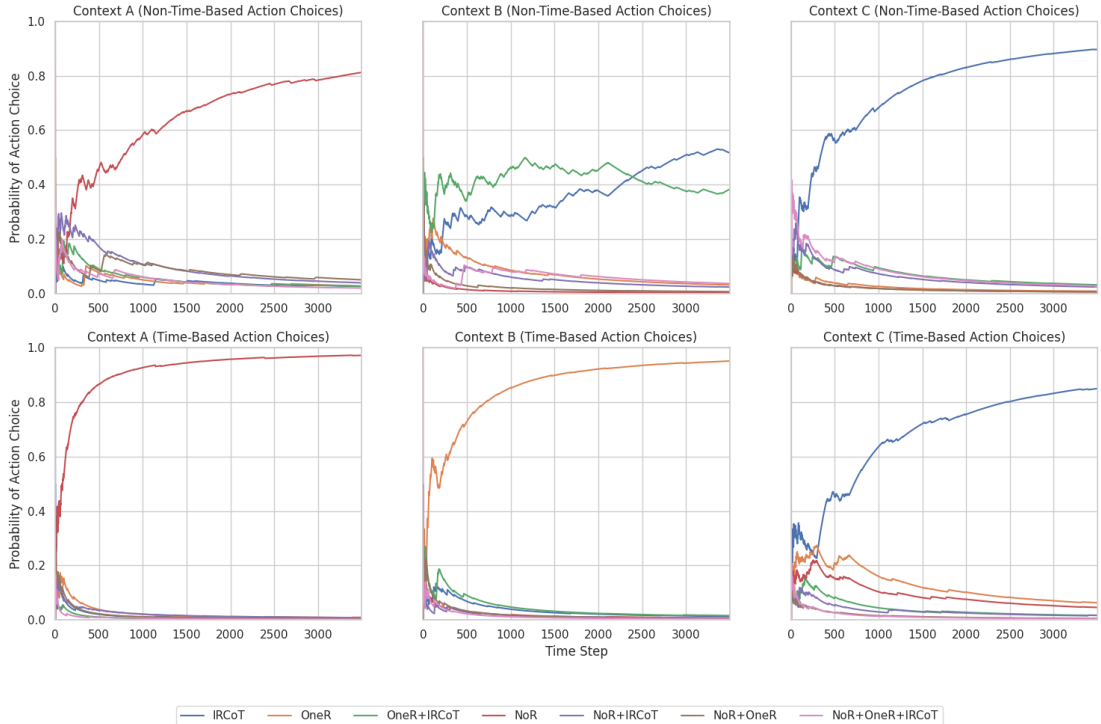


Figure 3: LinUCB action selection distribution for the collaborative action space.

response to the gold standard answer for the question. For computation costs, we report the average execution time per query, indicating the time it took for the executed action (agent or collaborative graph) to generate the final response.

5 Experimental Results

To be able to interpret the results of our CMAB experiments, we first assess the individual performance of each agent defined in L' on the training dataset (shown in Table 1). This evaluation reveals distinct performance levels for each agent across different complexity levels. The NoR agent excels in the simplest scenarios, while IRCoT surpasses all others at complexity levels B and C. At level B, IRCoT slightly outperforms OneR (.580 versus .518), albeit at a significantly higher time cost (192.30 versus 6.41 seconds). This increase is due to IRCoT’s potential for up to 10 rounds of retrieval and CoT, potentially enhancing document relevance and “reasoning” toward the right answer, but at the expense of greater response time in practical applications. In real-world, the time cost translates to the waiting time for the user to get a potential correct response from the system.

5.1 Optimization of Individual Agents Setup

In this set of experiments, we aim to verify whether CMAB can learn to map the complexity level of incoming questions to the most optimal action in the individual action space (where each action consists of choosing among possible set of agents L). To test this hypothesis, we need to verify whether training LinUCB causes the expected reward for the

best action to converge toward the actual reward for that action. We perform our experiments in both time-agnostic and time-based modes to assess the effect of time consideration in our framework:

- **Time-agnostic reward.** The first row of Figure 1 depicts the estimated reward for time-agnostic optimization progress. Looking at this figure, we can see the results of Table 1 also depicted here, as the CMAB learns to choose the best-performing action for each relevant context (NoR for context label A and IRCoT for context labels B and C).
- **Time-based reward.** Incorporating the time cost into the reward calculation, we observe from the second row of Figure 1 that the model progressively selects efficient actions for context B. Specifically, it favors the OneR agent, which balances robust performance with reasonable processing time.

5.2 Optimization of Collaborative Agents Setup

In this step, our goal is to verify whether AQA is able to learn an optimal mapping between the complexity level of questions and the suitable collaborative graph configuration.

- **Time-agnostic reward.** In Figures 2 and 3, the top rows depict the expected rewards and action selection distribution for LinUCB, without considering time in the reward. These results reveal optimal actions identified for each complexity label; NoR for context A, and IRCoT for contexts B and C, based on F1-scores. The dotted lines in the figures depict the real reward calculated for the best possible action per context.

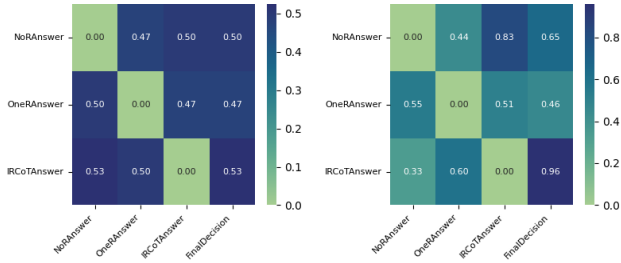


Figure 4: Edge probabilities distribution among NoR, OneR, IRCoT, and FinalDecision nodes before (left) and after (right) optimization using GPTSwarm. (Zhuge et al. 2024).

- **Time-based reward.** The bottom rows of Figures 2 and 3 depict results for training while including time cost in the reward calculation. Considering both performance and the time cost, the real reward for best actions per labels are shown in the plots as dotted red lines. Including time in reward calculation, we observe that the model preferentially selects actions that balance efficacy with reasonable execution times. Specifically, in context B, it prioritizes the configuration with OneR linked to the v_{final} over the configuration with IRCoT or a combination of better-performing agents (i.e., OneR+IRCoT) connected to v_{final} .

The results presented above demonstrate that our proposed setup is useful in adaptive orchestration in both a disjoint LLM setup, where the task is to choose the best agent for a specific task, but also in an orchestration setup where multiple nodes/modules might be involved to answer a question and the task there is to choose the best communication configuration between these modules considering the characteristics of the incoming question.

5.3 AQA vs GPTSwarm for Orchestration

Here, we aim to assess how a non-adaptive orchestration optimization affects the performance. To this aim, we compare AQA and GPTSwarm (Zhuge et al. 2024) in collaborative mode, train them both, and assess them on our test set. Both models are trained and tested using the same graph structure described in Section 3.3. As GPTSwarm does not allow for the inclusion of either context or time cost in the proposed framework, in our setup (similar to what Zhuge et al. (2024) do in their MMLU experiment) at both training and test time we feed each question to the framework and the optimization gradually converges to the *most optimal* graph configuration by optimizing towards better performance (F1-score).

The edge probability distribution of the graph before and after REINFORCE optimization is shown in Figure 4. As we can see, after training for 200 epochs, the final optimized graph consists of both NoR and IRCoT agents, and the OneR agent’s edge to the FinalDecision node is pruned out (edges with probabilities lower than .5 are pruned out based on the implementation by Zhuge et al. (2024)). This shows, as expected, that this static framework fails to adapt to different complexity levels by routing for a good enough answering strategy that is also time-efficient, as it only favors higher accumulative F1 scores across time.

	AQA (NT)		AQA (T)		GPTSwarm	
	F1	Time	F1	Time	F1	Time
Context A	1.0	6.18	1.0	6.18	0.862	12.78
Context B	0.568	12.04	0.539	8.73	0.327	12.79
Context C	0.523	11.75	0.523	11.75	0.317	12.76
Overall	0.697	9.99	0.687	8.89	0.502	12.78

Table 2: Evaluation of AQA (NT: Time-agnostic reward, T: Time-based reward) and GPTSwarm (Zhuge et al. 2024) on the test set by F1-score and time (log-transformed, in ms). Both have been trained on the training set. For GPTSwarm, the final optimized graph configuration is used for evaluation.

The evaluation results on the test set are shown in Table 2. The first two columns show the CMAB model (LinUCB) with and without time considered in the reward implementation respectively and the last column is the final optimized graph using REINFORCE. Using a fixed orchestration by GPTSwarm, we observe a fall in performance for different complexity levels, as it is not possible to adapt the strategy based on the characteristics of the question, which leads to a lower overall performance compared to AQA (NT and T). Also, as the fixed configuration in GPTSwarm is also more sophisticated (i.e. both NoR and IRCoT have edges to the final decision node), the time cost is constantly higher compared to AQA.

6 Discussion and Conclusion

In this study, we introduced AQA, a novel adaptive QA framework that uniquely frames the adaptive QA problem as a contextual multi-armed bandit problem, where the action space is a set of graph structures among LLM agents that describe their interactions. Thereby, the AQA framework dynamically orchestrates the collaboration of multiple agents in response to specific question characteristics. We evaluated our approach using a multi-complexity-level QA dataset and validated that our approach can successfully recognize the optimal mapping for each question type.

Future work could consider integrating additional models into the graph component and employing more advanced contextual features for the questions, such as semantic representations or predefined textual features. This direction could also explore more advanced CB methods than the LinUCB to enhance the scalability and applicability of our framework. Another avenue for the future work is the comparison of our setup which is based on the society of mind (SoM) theory (Minsky 1988; Zhuge et al. 2023), to mixture of experts (MoE) based setups (Jiang et al. 2024; Zhou et al. 2022) as there are clear similarities but also distinctions such as the agent roles definition, the routing strategy, and the decision space. In SoM, each agent role is predefined and no specific learning is happening at the agent (LLM) level. Also, SoM allows for explicit natural language-based communication between agents, which is not the case in MoE architectures. It is interesting to compare the two setups to understand how they potentially outperform or complement each other for future LLM-based system designs.

Resources

The code and other resources needed to reproduce the results of this paper are publicly available at <https://github.com/informagi/AQA>.

Acknowledgments

This research was supported by the Dutch Research Council (NWO), under project numbers VI.Veni.222.269, 024.004.022, NWA.1389.20.183, and KICH3.LTP.20.006, and the EU’s Horizon Europe program under grant No 101070212. All content represents the opinion of the authors, which is not necessarily shared or endorsed by their respective employers and/or sponsors.

We would also like to thank Nik Vaessen for the useful discussions that helped inform aspects of this work.

References

- Asai, A.; Wu, Z.; Wang, Y.; Sil, A.; and Hajishirzi, H. 2024. Self-RAG: Learning to Retrieve, Generate, and Critique through Self-Reflection. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net.
- BehnamGhader, P.; Miret, S.; and Reddy, S. 2023. Can Retriever-Augmented Language Models Reason? The Blame Game Between the Retriever and the Language Model. In Bouamor, H.; Pino, J.; and Bali, K., eds., *Findings of the Association for Computational Linguistics: EMNLP 2023, Singapore, December 6-10, 2023*, 15492–15509. Association for Computational Linguistics.
- Chan, C.-M.; Xu, C.; Yuan, R.; Luo, H.; Xue, W.; Guo, Y.; and Fu, J. 2024. RQ-RAG: Learning to Refine Queries for Retrieval Augmented Generation. *arXiv preprint arXiv:2404.00610*.
- Cuconasu, F.; Trappolini, G.; Siciliano, F.; Filice, S.; Campagnano, C.; Maarek, Y.; Tonello, N.; and Silvestri, F. 2024. The Power of Noise: Redefining Retrieval for RAG Systems. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval*, 719–729.
- Dai, X.; Hua, Y.; Wu, T.; Sheng, Y.; and Qi, G. 2024. Counter-intuitive: Large Language Models Can Better Understand Knowledge Graphs Than We Thought. *CoRR*, abs/2402.11541.
- Edge, D.; Trinh, H.; Cheng, N.; Bradley, J.; Chao, A.; Mody, A.; Truitt, S.; and Larson, J. 2024. From Local to Global: A Graph RAG Approach to Query-Focused Summarization. *CoRR*, abs/2404.16130.
- Hendrycks, D.; Burns, C.; Basart, S.; Zou, A.; Mazeika, M.; Song, D.; and Steinhardt, J. 2021. Measuring Massive Multitask Language Understanding. *Proceedings of the International Conference on Learning Representations (ICLR)*.
- Hong, S.; Zhuge, M.; Chen, J.; Zheng, X.; Cheng, Y.; Wang, J.; Zhang, C.; Wang, Z.; Yau, S. K. S.; Lin, Z.; Zhou, L.; Ran, C.; Xiao, L.; Wu, C.; and Schmidhuber, J. 2024. MetaGPT: Meta Programming for A Multi-Agent Collaborative Framework. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net.
- Jeong, S.; Baek, J.; Cho, S.; Hwang, S. J.; and Park, J. C. 2024. Adaptive-RAG: Learning to Adapt Retrieval-Augmented Large Language Models through Question Complexity. *CoRR*, abs/2403.14403.
- Jiang, A. Q.; Sablayrolles, A.; Roux, A.; Mensch, A.; Savary, B.; Bamford, C.; Chaplot, D. S.; de Las Casas, D.; Hanna, E. B.; Bressand, F.; Lengyel, G.; Bour, G.; Lample, G.; Lavaud, L. R.; Saulnier, L.; Lachaux, M.; Stock, P.; Subramanian, S.; Yang, S.; Antoniak, S.; Scao, T. L.; Gervet, T.; Lavril, T.; Wang, T.; Lacroix, T.; and Sayed, W. E. 2024. Mixtral of Experts. *CoRR*, abs/2401.04088.
- Langford, J.; and Zhang, T. 2007. The Epoch-greedy Algorithm for Contextual Multi-armed Bandits. *Advances in Neural Information Processing Systems*, 20(1): 96–1.
- Li, G.; Hammoud, H.; Itani, H.; Khizbullin, D.; and Ghanem, B. 2023. CAMEL: Communicative Agents for “Mind” Exploration of Large Language Model Society. In Oh, A.; Naumann, T.; Globerson, A.; Saenko, K.; Hardt, M.; and Levine, S., eds., *Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 - 16, 2023*.
- Li, L.; Chu, W.; Langford, J.; and Schapire, R. E. 2010. A Contextual-bandit Approach to Personalized News Article Recommendation. In *Proceedings of the 19th International Conference on World Wide Web*, 661–670.
- Li, X.; Zhao, R.; Chia, Y. K.; Ding, B.; Joty, S.; Poria, S.; and Bing, L. 2024. Chain-of-Knowledge: Grounding Large Language Models via Dynamic Knowledge Adapting over Heterogeneous Sources. In *The Twelfth International Conference on Learning Representations*.
- Liu, N. F.; Lin, K.; Hewitt, J.; Paranjape, A.; Bevilacqua, M.; Petroni, F.; and Liang, P. 2024. Lost in the Middle: How Language Models Use Long Contexts. *Trans. Assoc. Comput. Linguistics*, 12: 157–173.
- Mallen, A.; Asai, A.; Zhong, V.; Das, R.; Khashabi, D.; and Hajishirzi, H. 2023. When Not to Trust Language Models: Investigating Effectiveness of Parametric and Non-Parametric Memories. In Rogers, A.; Boyd-Graber, J. L.; and Okazaki, N., eds., *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2023, Toronto, Canada, July 9-14, 2023*, 9802–9822. Association for Computational Linguistics.
- Minsky, M. 1988. *Society of mind*. Simon and Schuster.
- Olausson, T.; Gu, A.; Lipkin, B.; Zhang, C.; Solar-Lezama, A.; Tenenbaum, J.; and Levy, R. 2023. LINC: A Neurosymbolic Approach for Logical Reasoning by Combining Language Models with First-Order Logic Provers. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*. Association for Computational Linguistics.

- Pan, J. Z.; Razniewski, S.; Kalo, J.; Singhanian, S.; Chen, J.; Dietze, S.; Jabeen, H.; Omeliyanenko, J.; Zhang, W.; Lissandrini, M.; Biswas, R.; de Melo, G.; Bonifati, A.; Vakaj, E.; Dragoni, M.; and Graux, D. 2023. Large Language Models and Knowledge Graphs: Opportunities and Challenges. *TGDK*, 1(1): 2:1–2:38.
- Pan, S.; Luo, L.; Wang, Y.; Chen, C.; Wang, J.; and Wu, X. 2024. Unifying Large Language Models and Knowledge Graphs: A Roadmap. *IEEE Trans. Knowl. Data Eng.*, 36(7): 3580–3599.
- Park, J. S.; O’Brien, J. C.; Cai, C. J.; Morris, M. R.; Liang, P.; and Bernstein, M. S. 2023. Generative Agents: Interactive Simulacra of Human Behavior. In Follmer, S.; Han, J.; Steimle, J.; and Riche, N. H., eds., *Proceedings of the 36th Annual ACM Symposium on User Interface Software and Technology, UIST 2023, San Francisco, CA, USA, 29 October 2023- 1 November 2023*, 2:1–2:22. ACM.
- Ram, O.; Levine, Y.; Dalmedigos, I.; Muhlgay, D.; Shashua, A.; Leyton-Brown, K.; and Shoham, Y. 2023. In-context Retrieval-augmented Language Models. *Transactions of the Association for Computational Linguistics*, 11: 1316–1331.
- Siegel, N.; Camburu, O.-M.; Heess, N.; and Perez-Ortiz, M. 2024. The Probabilities Also Matter: A More Faithful Metric for Faithfulness of Free-Text Explanations in Large Language Models. In Ku, L.-W.; Martins, A.; and Srikumar, V., eds., *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, 530–546. Bangkok, Thailand: Association for Computational Linguistics.
- Slivkins, A. 2019. Introduction to Multi-Armed Bandits. *Foundations and Trends in Machine Learning*, 12(1-2): 1–286.
- Trivedi, H.; Balasubramanian, N.; Khot, T.; and Sabharwal, A. 2023. Interleaving Retrieval with Chain-of-Thought Reasoning for Knowledge-Intensive Multi-Step Questions. In Rogers, A.; Boyd-Graber, J. L.; and Okazaki, N., eds., *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, ACL 2023, Toronto, Canada, July 9-14, 2023, 10014–10037. Association for Computational Linguistics.
- Wei, J.; Wang, X.; Schuurmans, D.; Bosma, M.; Xia, F.; Chi, E.; Le, Q. V.; Zhou, D.; et al. 2022. Chain-of-thought Prompting Elicits Reasoning in Large Language Models. *Advances in neural information processing systems*, 35: 24824–24837.
- Wu, Q.; Bansal, G.; Zhang, J.; Wu, Y.; Zhang, S.; Zhu, E.; Li, B.; Jiang, L.; Zhang, X.; and Wang, C. 2023. AutoGen: Enabling Next-Gen LLM Applications via Multi-Agent Conversation Framework. *CoRR*, abs/2308.08155.
- Xu, S.; Pang, L.; Shen, H.; Cheng, X.; and Chua, T. 2024. Search-in-the-Chain: Interactively Enhancing Large Language Models with Search for Knowledge-intensive Tasks. In Chua, T.; Ngo, C.; Kumar, R.; Lauw, H. W.; and Lee, R. K., eds., *Proceedings of the ACM on Web Conference 2024, WWW 2024, Singapore, May 13-17, 2024*, 1362–1373. ACM.
- Yang, Z.; Qi, P.; Zhang, S.; Bengio, Y.; Cohen, W. W.; Salakhutdinov, R.; and Manning, C. D. 2018. HotpotQA: A Dataset for Diverse, Explainable Multi-hop Question Answering. In Riloff, E.; Chiang, D.; Hockenmaier, J.; and Tsujii, J., eds., *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, Brussels, Belgium, October 31 - November 4, 2018*, 2369–2380. Association for Computational Linguistics.
- Yao, S.; Yu, D.; Zhao, J.; Shafran, I.; Griffiths, T.; Cao, Y.; and Narasimhan, K. 2023. Tree of Thoughts: Deliberate Problem Solving with Large Language Models. In Oh, A.; Naumann, T.; Globerson, A.; Saenko, K.; Hardt, M.; and Levine, S., eds., *Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 - 16, 2023*.
- Yoran, O.; Wolfson, T.; Ram, O.; and Berant, J. 2024a. Making Retrieval-Augmented Language Models Robust to Irrelevant Context. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net.
- Yoran, O.; Wolfson, T.; Ram, O.; and Berant, J. 2024b. Making Retrieval-Augmented Language Models Robust to Irrelevant Context. In *The Twelfth International Conference on Learning Representations*.
- Zhou, Y.; Lei, T.; Liu, H.; Du, N.; Huang, Y.; Zhao, V.; Dai, A. M.; Le, Q. V.; Laudon, J.; et al. 2022. Mixture-of-experts with Expert Choice Routing. *Advances in Neural Information Processing Systems*, 35: 7103–7114.
- Zhuge, M.; Liu, H.; Faccio, F.; Ashley, D. R.; Csordás, R.; Gopalakrishnan, A.; Hamdi, A.; Hammoud, H. A. A. K.; Herrmann, V.; Irie, K.; Kirsch, L.; Li, B.; Li, G.; Liu, S.; Mai, J.; Piekos, P.; Ramesh, A.; Schlag, I.; Shi, W.; Stanic, A.; Wang, W.; Wang, Y.; Xu, M.; Fan, D.; Ghanem, B.; and Schmidhuber, J. 2023. Mindstorms in Natural Language-Based Societies of Mind. *CoRR*, abs/2305.17066.
- Zhuge, M.; Wang, W.; Kirsch, L.; Faccio, F.; Khizbullin, D.; and Schmidhuber, J. 2024. Language Agents as Optimizable Graphs. *CoRR*, abs/2402.16823.